


A10 Brass ball valve

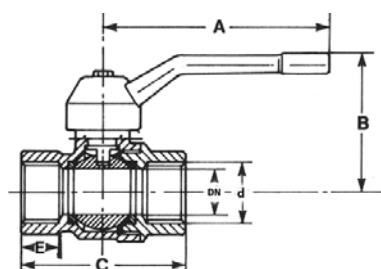


Description

- 2-way ball valve BSP female threaded
- Body and Ball Brass MS58 chromium plated
- Seats PTFE
- O-rings Viton®
- Lever aluminium epoxy coated
- Working pressure maximum 25 Barg up to 95 C. up to 3", 4" maximum 20 Barg, 16 Barg from 95 up to 120° C.
- Full bore
- Temperature -20 up to 120° C.
- Available 1/4" up to 4"
- With different colors levers available, standard yellow or blue

Dimensions 1/4" up to 4" [mm]											
d	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
DN	8	10	15	20	25	32	40	50	65	80	90
A	75	75	90	90	120	120	150	150	200	240	240
B	31	33	49	50	65	70	80	87	120	135	145
C	44	45	56	64	74	85	98	110	134	160	186
Weight [kg]	0.11	0.1	0.2	0.3	0.48	0.71	1.05	1.536	2.92	5.46	7.48

A50 Brass ball valve



Description

- 2-way ball valve BSP female threaded
- Body and Ball Brass MS58 chromium plated
- Seats PTFE
- O-rings Viton®
- Lever aluminium epoxy coated
- Working pressure maximum 40 Barg up to 95° C., 25 Barg from 95 up to 120° C.
- Full bore
- Temperature -20 up to 120° C.
- Available 1/4" up to 2"

Dimensions 1/4" up to 2" [mm]								
d	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
DN	8	10	15	20	25	32	38	47
A	75	75	90	90	120	120	150	150
B	32	42	50	53	62	70	78	85
C	50	60	65	65	86	95	101	120
Weight [kg]	0.11	0.15	0.255	0.35	0.64	0.955	1.11	1.97